


Possible applications include :



Swinging gates

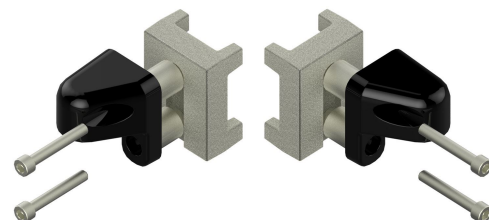

## Features


- Aluminium ear
- Crude aluminium spacers insert
- Composite friction ring Ø12



### Tip

- The screw-in ears with their fastening inserts are specific to some integrated frame profiles on the market (please contact us).


To ensure that the hinge remains firmly attached to the leaf, these ears must be assembled with an insert in the integrated frame.

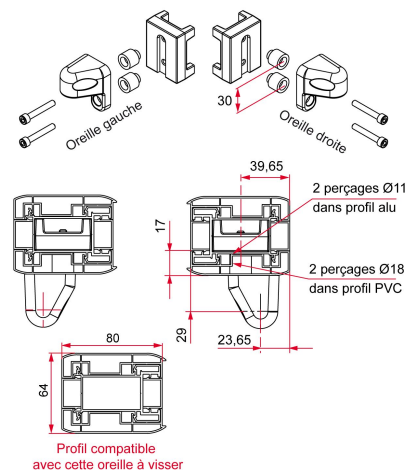

Possible applications include :



Swinging gates

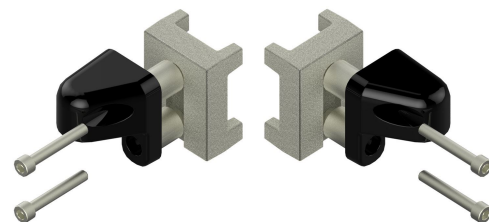




## Screw-in ear - Ø12 - spacer of 17mm thickness for built-in frame

Possible applications include :



Swinging gates

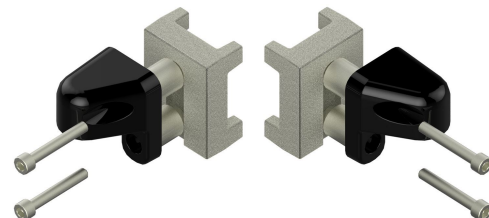

Référence	Ear	Finishing stage	GENCOD 3661598	Condit. par	Délai j
NE692208	LEFT	9005-80%	04820 0	1	14
NE691208	LEFT	9016-80%	04821 7	1	14
NE619208	LEFT	raw	04819 4	1	7
NE692108	RIGHT	9005-80%	04823 1	1	14
NE691108	RIGHT	9016-80%	04824 8	1	14
NE619108	RIGHT	raw	04822 4	1	7

 Multi-RAL : specify your color when placing the order (<https://www.couleursral.fr/ral-classic>)